

## Funke Chamber DN/OD 400

Price-Inquiry

Binding Order

Please complete and send to: per post, see address below, per fax: +49 2388 3071-7550, per e-mail: info@funkegruppe.de

Sender / Contact details:	Project / Site Address:	Order placed by:
		Order Date:
		Delivery Date:
		Chamber Number:

Groundwater Level Below Cover Level [m]: \_\_\_\_\_

Invert Level Outflow [m]: \_\_\_\_\_

Ground Level - Channel Bottom

Model: Type 1  Type 2

Colour: Brown  Blue

**Cover:** Telescopic cover DN/OD 315 class D 400 without ventilation  with ventilation  as inlet grate   
incl. sludge bucket incl. sludge bucket

**Entrance:**


According to DIN EN 476, chambers that are not accessible may not exceed the maximum installation depth of 3.0 metres!

**Installation depth:**


Type 1 = 1,00 m - 1,20 m  
Type 2 = 1,10 m - 3,00 m

By shortening the telescopic pipe on site, a minimum installation depth of 0.75 m can be achieved for type 1.

**Type RML**

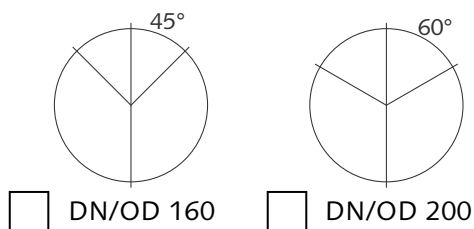

**Type G**

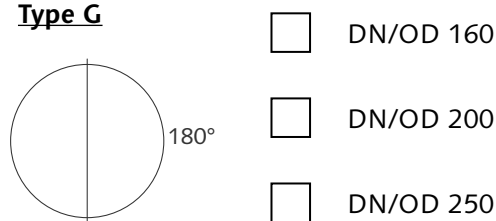

Date/Signature:  
**to be completed by Costumer**

**Send**

**Notes:**

- DN/OD 160 and DN/OD 200 incl. VARIOcoupler
- from DN/OD 250
- Channel Height = 1/2 Nominal diameter