

Funke Chamber DN/OD 630

Price-Inquiry

Binding Order

Please complete and send to: per post, see address below, per fax: +49 2388 3071-7550, per e-mail: info@funkegruppe.de

Sender / Contact details:	Project / Site Address:	Order placed by:
		Order Date:
		Delivery Date:
		Chamber Number:

Groundwater Level Below Cover Level [m]: _____

Invert Level Outflow [m]: _____

Ground Level - Channel Bottom

Colour

Brown

Blue

Entrance:

According to DIN EN 476, chambers that are not accessible may not exceed the maximum installation depth of 3.0 metres!

When using a commercial cover in class B 125 or class D 400, a concrete load distribution ring is absolutely necessary!

Installation depth:

0,70 m* - 3,00 m

*depending on nominal diameter


Cover:

Class B 125


Class D 400

Self-leveling

Height [mm]:

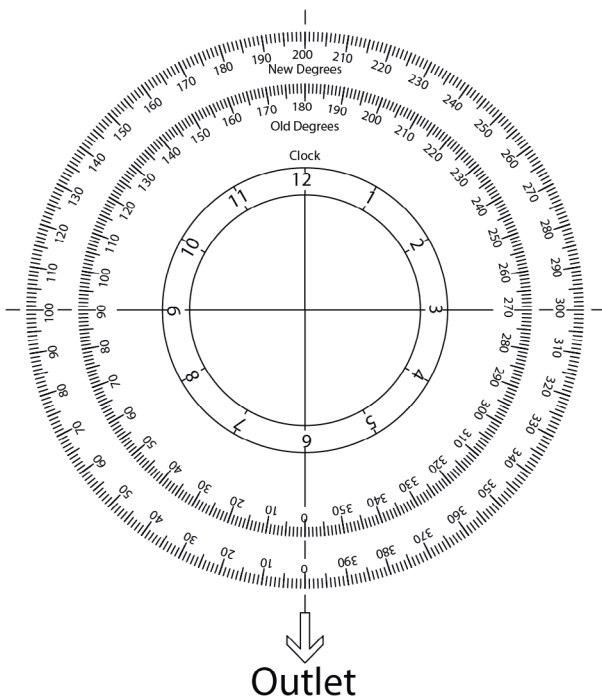

Type G




DN/OD 160

DN/OD 200

DN/OD 250

DN/OD 315

Type RML



DN/OD 160

DN/OD 200

Date/Signature:

to be completed by Customer

Send

Notes:

- Channel Design with only one inlet (change of directions) can also be manufactured in 135° / 150° / 165° / 195° / 210° and 225°
- DN/OD 160 and DN/OD 200 incl. VARIOcoupler
- from DN/OD 250 Channel Height = 1/2 Nominal diameter